Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

NMB TECHNOLOGIES INC.

DC 2406KL Series Fan

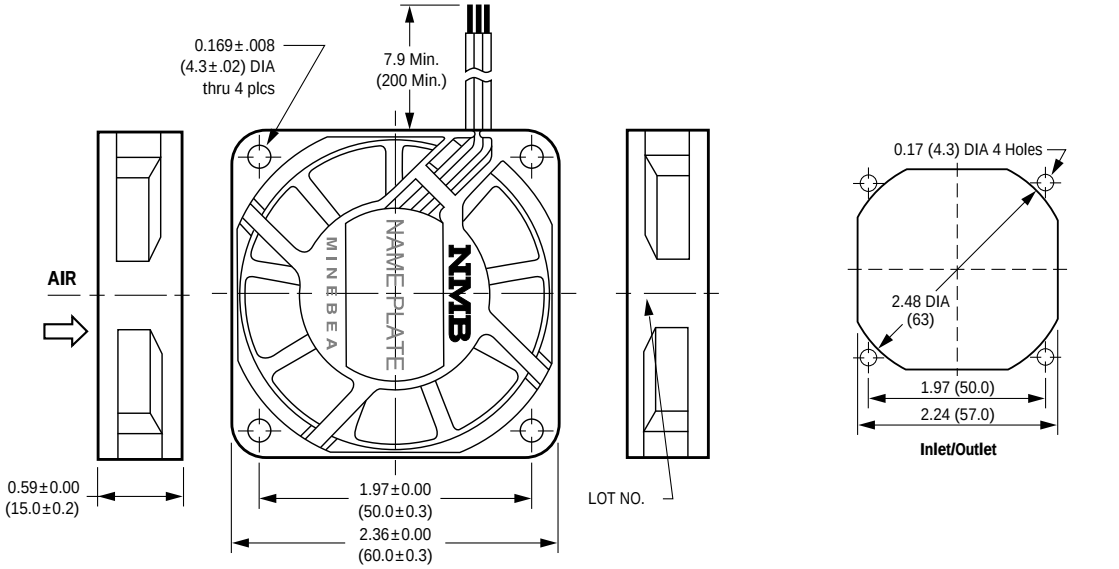

Dimensions are in inches. ( ) are in millimeters

FEATURES / BENEFITS

- Size: 2.36 in sq. X 0.59 in (60mm sq. X 15mm)
- Low Noise Levels: 19 ~ 34 dB(A)
- Low Weight: 1.59 oz (45g)
- Long life and quiet operation guaranteed by dual ball bearing design
- Temperature range: –10°C to +70°C (operating range)
- Meets UL/CSA, VDE, CE requirements
- Airflow: 7 ~ 19 CFM
- Lead Wires: AWG 26, Red/Black/UL1007
- Applications: Pentium™ Class Notebooks, Set Top Boxes, Docking Stations, and Telephone Packs

Model Number	Operating Voltage	Rated Voltage	Max. Air Flow [1]	Max. Static Pressure [1]	Speed [1]	Current	Input Power	Noise
		V	m^3/min	Pa	rpm	A	W	dB
2406KL-04W-B10-L00	7~13.8	12	0.19	8.5	1800	0.04	0.48	19
2406KL-04W-B20-L00	6~13.8	12	0.33	23.4	3100	0.07	0.84	25
2406KL-04W-B30-L00	6~13.8	12	0.40	31.3	3600	0.09	1.08	28
2406KL-04W-B40-L00	6~13.8	12	0.45	39.7	4100	0.13	1.56	31
2406KL-04W-B50-L00	6~13.8	12	0.52	51.2	4600	0.16	1.92	34

1) Average values

Air Flow Curves

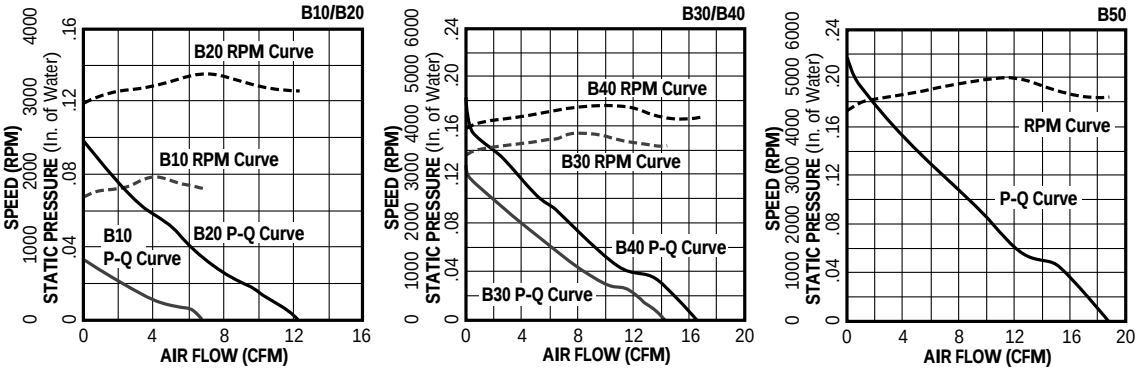

ISO 9002

NMB TECHNOLOGIES INC.

9730 Independence Ave., Chatsworth, California 91311 • Telephone: (800) 662-8321 • Internet: http://www.nmbtech.com

AF8/97 Printed in U.S.A. Specifications Subject to Change Without Notice. All other brand or product names mentioned are trademarks or registered trademarks of their respective holders.